

# NSB 40FT Red Battery®

Long float life at elevated temperatures



*Red Star Technology*® uses pure lead plates to deliver **exceptionally long float life even at elevated temperatures.**

- Pure lead AGM technology delivers long float life for telecom applications even at elevated temperatures
- 15 year float life at 20°C (68°F)
- EUROBAT design life definition: Long Life (12+ years)
- High energy density
- Operating temperature range: -40°C to +65°C (-40°F to 149°F)
- State-of-the-art automated manufacturing ensures consistency and reliability
- Advanced 3 stage terminal design to ensure leak-free operation - female M6 brass terminals provide maximum performance
- 2 year shelf life at 25°C (77°F)
- High modulus Polyphenylene Oxide (PPO) plastic materials designed to withstand extended elevated operating temperatures and maintain high battery compression essential for reliable operation
  - Non-halogenated, thermally sealed plastic casing
  - Flame retardant (UL 94 VO) and LOI of at least 28%
- Front access terminals ensure ease of installation and maintenance
- Approved as non-hazardous cargo for ground, sea, and air transport - DOT 49CFR173.159(d), (i) and (ii)

Visit our website to find out more [www.northstarbattery.com](http://www.northstarbattery.com)



# NSB 40FT Red Battery®

## Nominal Technical Specifications



### Electrical

	International Standard 20°C (68°F)	North American Standard 25°C (77°F)
8 hour capacity to 1.75 VPC	39 Ah	39 Ah
10 hour capacity to 1.80 VPC	40 Ah	40 Ah
Float Voltage	2.29 +/- 0.02 VPC	2.27 +/- 0.02 VPC
Nominal Voltage	12 V	
Impedance [1kHz]	4.1 mΩ @ 25°C [77°F]	
Conductance	1042 S	
Short Circuit Current	1,500 A	


### Dimensions

Height	208 mm (8.2 in)	Weight	14 kg (31 lbs)
Width	97 mm (3.8 in)	Terminal	Female M6 x 1.0
Depth	250 mm (9.8 in)	Terminal Torque	8.0 Nm (71 in-lbs)

### Ah Capacity Ratings @ 25°C (77°F)

Capacity Discharge / hours	1	2	4	8	10
Capacity @ 25°C / Ah	30	33	36	39	40
End of Discharge / VPC	1.70	1.75	1.75	1.75	1.80

### Drawings

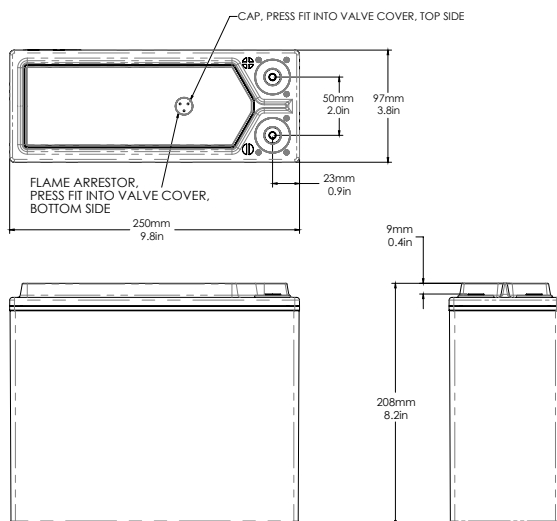

All NorthStar batteries are compliant with: Telcordia SR4228, IEC 60896; Bellcore GR-63-Core, Issue 1; British, German, and Russian telecom standards; UL approved. NorthStar is registered to ISO 9001 and ISO 14001.

**NorthStar Americas**  
 NorthStar Battery Company LLC  
 4000 Continental Way  
 Springfield, MO, 65803,  
 United States of America  
 info@northstarbattery.com  
 Tel: +1 417 575 8200  
 Fax: +1 417 575 8250

**NorthStar Europe**  
 SiteTel Sweden AB  
 Staffans Väg 6-8  
 SE-192 07 Sollentuna,  
 Stockholm, Sweden  
 europe@northstarbattery.com  
 Tel: +46 8 410 102 00  
 Fax: +46 8 638 06 00

**NorthStar Middle East,  
 Africa**  
 SiteTel Sweden AB JTL Branch  
 Office 702, Saba 1 Tower  
 Jumeirah Lake Towers, Dubai  
 United Arab Emirates  
 mea@northstarbattery.com  
 Tel: +971 4 423 8060  
 Fax: +971 4 423 8061

**NorthStar Asia-Pacific**  
 NS Asia Pacific Sdn. Bhd.  
 Level 20, Menara Standard  
 Chartered  
 30 Jalan Sultan Ismail, 50250  
 Kuala Lumpur, Malaysia  
 asia@northstarsitetel.com  
 Tel: +60 3 2117 5354

[www.northstarbattery.com](http://www.northstarbattery.com)

